

Warning signs for road and environmental conditions

Operational Instruction 2.26

April 2025



Government of South Australia
Department for Infrastructure
and Transport

Build.
Move.
Connect.

Disclaimer

While every reasonable effort has been made to ensure that this document is correct at the time of publication, the Minister for Infrastructure and Transport, its agencies, instrumentalities, employees, and contractors disclaim any and all liability to any person in respect to anything or the consequence of anything done or omitted to be done in reliance upon the whole or any part of this document.

Publication details

Document information

Title	Warning signs for road and environmental conditions Operational Instruction 2.26
Owner	Traffic Engineering Standards
KNet reference	#1585754

Change history

Version	Date changed	Nature of amendment
5	21 October 2010	Original issue
5.1	20 October 2015	Gravel Roads (W5-SA73) sign added
6	5 June 2019	Maintenance condition signing added
7	9 December 2021	Format update; maintenance condition signing and approval details added
8	23 April 2025	Format update; updated references to AS 1742.2 (2022); Road Traffic Act Section 17 approval details added; additional guidance on gravel road signs

Approvals record

Approver	Position	Date	Signature
Stephen Pascale	Manager, Traffic Services	17 April 2025	Digital Approval 48179

We acknowledge the Traditional Custodians of the Country throughout South Australia and recognise their continuing connection to land and waters. We pay our respects to the diversity of cultures, significance of contributions and to Elders past, present and emerging.



Contents

1	Introduction	5
2	Maintenance condition and temporary hazard warning signs	5
2.1	Uneven surface sign.....	6
2.2	Rough surface sign	7
2.3	Slippery surface sign.....	7
2.4	Fuel spill sign	7
2.5	Speed signs	8
3	Road condition warning signs.....	8
3.1	Gravel road signs	8
3.2	Steep descents	9
4	Environmental condition warning signs	10
4.1	Cross wind sign.....	10
4.2	Water hazard sign	10
4.2.1	Creek and creeks.....	10
5	NEXT__km Supplementary sign.....	11
	Appendix A – Placement of maintenance condition warning signs	12

1 Introduction

This document provides guidance on the use of road surface and environmental condition warning signs. It aims to ensure that warning signs are installed on a consistent statewide basis.

It shall be read in conjunction with Australian Standard *AS 1742.2 Manual of Uniform Traffic Control Devices (MUTCD) Part 2: Traffic Control Devices for General Use*.

The guidance in this document applies to roads under the care, control, and management of the Commissioner of Highways. Councils may refer to this document for guidance on the use of these signs on their roads. The use of speed limits signs (R4-1 and G9-79 signs) require approval from the Department for Infrastructure and Transport (the Department).

The traffic control devices in this document (with the exception of R4-1 and G9-79 signs) may be installed under the Minister's *Instrument of General Approval and Delegation to Council*, or the Instrument of Authorisation and Delegation to the Department's Network Management Services. Traffic control devices which vary from this document require the separate approval of the Manager, Traffic Services for each location prior to installation.

Refer to the *SA Standards for Workzone Traffic Management* for the use of warning signs at road works (including warning signs and speed limits for new surfaces).

The Department acknowledges the assistance of Transport Victoria in the development of Section 2 and Appendix A of this document.

2 Maintenance condition and temporary hazard warning signs

Sections of road may from time to time contain hazards that reduce the level of service for motorists. These hazards cannot be managed under normal routine maintenance, and include:

- significant potholes after wet weather
- shape loss
- significant and persistent roughness, especially that deteriorates with existing traffic loadings and/or wet weather between scheduled routine inspections.
- significant slippery sections, e.g., visual flushing in high-speed zones (> 80 km/h)

Maintenance condition signing should not be considered as a final or long-term solution to a problem. Rather, corrective action should be programmed, and the sign should only be used as a warning to drivers until such time as remedial action is completed. To maintain credibility the signs shall be removed once the deficiency has been corrected.

Signage options may include warning signs, advisory speed signs and regulatory speed signs as discussed below.

The signs should be selected according to the following hierarchy:

1. Warning signs – to improve safety by advising road users of the road conditions. (Refer to Appendix A Figure 1)
2. Warning signs and speed advisory signs – to improve safety and advise of hazards that exist for road users in some conditions (Refer to Appendix A Figure 2 or 3)
3. Warning signs and regulatory speed signs – to improve safety and advise road users of hazards that affect all road users in all conditions. (Refer to Section 2.5 and Appendix A Figure 4)

In DIT, the appropriate use of these signs shall be determined by the Road Assets Section through a risk assessment process taking into account the following:

- Site safety inspection and assessment, including the extend of road to be signed
- Visual pavement condition inspection, including texture, polished aggregate, skid resistance, rutting undulations, crossfall and ponding
- Pavement condition compared to existing maintenance standards and intervention levels
- Crash history
- 85th percentile speeds
- Appropriate travel speed based on safety and vehicle occupant comfort, considering suspension bottoming, handling and passenger comfort

Signing a reduction in speed (either advisory or regulatory) would generally be recommended where the appropriate speed for traversing the deteriorated section is 15 km/h or more below the speed limit (or 85th percentile speed if actual speeds are likely to be above the posted speed limit). This is consistent with the approach in AS 1742.2 for advisory speeds on curves.

Where advisory speeds or regulatory speed zone signage changes are being considered, this should be discussed with Manager Traffic Services. As these signs are used for situations where roadworks is yet to commence, they require approval from the Department's Network Management Services under Section 17(3) of the *Road Traffic Act 1961* (use of a traffic control device for a temporary purpose), not Section 20 of the Act (roadworks permit).

NOTE: When the pavement is replaced or rehabilitated to correct the defects, all sign/s shall be removed.

2.1 Uneven surface sign



W5-43

The UNEVEN SURFACE (W5-43) sign should be used on sealed roads only to give warning to road users of an undulating stretch of road that is sufficiently uneven to cause considerable discomfort to vehicle occupants or to cause a shifting of the cargo while travelling at the posted speed limit.

This sign may be supplemented with a Next ___ km sign (W8-17-1). The use of the W8-17-1 sign is described in Section 5.

2.2 Rough surface sign



W5-SA117

The ROUGH SURFACE (W5-SA117) sign should be used to warn road users that the pavement surface condition is in poor condition i.e., potholes, rutting etc.

2.3 Slippery surface sign



W5-20

The SLIPPERY surface (W5-20) sign shall only be used to warn sections of road where the road pavement surface may be slippery due to the low skid resistance, or where a significant water flow runs across the road or water pools on the road after rain and the risk is likely to contribute to the incidence of a crash.

Thus, a SLIPPERY surface sign shall only be used where the low skid resistance is at level P1 or P2 (refer to the Department's internal policy on skid resistance). The location must also have clearly identified risk(s) and the risk(s) are likely to contribute to the incidence of a crash.



W8-7

At sites where water ponds on the road due to a lack of crossfall of the carriageway and drivers may lose control of their vehicles due to their vehicle aquaplaning across the road but the skid resistance is satisfactory, a SLIPPERY surface sign may be used with a WHEN WET (W8-7) supplementary sign.

If the road becomes slippery due to runoff from an adjoining private property or from an intersecting side road the sign may be used temporarily until the problem has been corrected.

This sign may also be supplemented with a Next ___ km sign (W8-17-1). The use of the W8-17-1 sign is described in Section 5. It should be repeated at intervals not exceeding 3 km. Other supplementary signs that may be used with the SLIPPERY surface sign are contained in AS 1742.2 (2022) clause 4.11.3(f).

On long sections of very slippery pavement consideration should be given to temporarily reducing the speed limit until the condition is rectified (see Section 2).

2.4 Fuel spill sign



T3-3

After a fuel spill or similar spill, the temporary SLIPPERY (T3-3) sign should be installed until the spill has been cleaned.

Signs shall remain in place until the condition of the pavement, under all likely weather conditions, meets acceptable levels.

This sign may also be installed under the *Instrument of General Approval – Approval for the Temporary Use of Traffic Control Devices by Persons Other Than Road Authorities*, dated August 2014.

2.5 Speed signs

When using the option of a speed limit (R4-1) sign in accordance with Section 2, it shall be supplemented with a Road Hazard (G9-SA114) sign. An advanced speed limit ahead (G9-79) sign may be used also if the speed limit drop is greater than or equal to 30 km/h.



R4-1



G9-SA114



G9-79

3 Road condition warning signs

3.1 Gravel road signs



W5-19

The GRAVEL ROAD (W5-19) sign shall be used in accordance with AS 1742.2 *MUTCD Part 2: Traffic control devices for general use (2022)* clause 4.11.3(a) to give advance warning of a road surface change from a sealed road to a singular section of unsealed road. It shall not be installed on a sealed road in advance to a turnoff to an unsealed road.

If there are further unsealed roads beyond the singular section of unsealed road, the W5-SA73 sign should also be installed after the W5-19 sign.



W8-21

The BOGGY WHEN WET supplementary sign (W8-21) should only be used in conjunction with the (W5-19) GRAVEL ROAD sign where the boggy nature of the road surface would be unexpected i.e. it is normal to expect most unsealed roads to be boggy to some extent in wet conditions.



W5-SA73

The W5-SA73 sign shall be used to give advanced warning of a change in road surface from a sealed road to a network of unsealed roads. It shall be installed at the entrance from the main (sealed) road to the network of unsealed roads.


These signs may be omitted from outback roads, or where there is a re-commencement of the unsealed road surface after a short section of sealed road.

NOTE: Gravel roads may also be signed with an advisory 80 km/h maximum speed where appropriate, in accordance with *Operational Instruction 4.10 Maximum 80 km/h Advisory Sign on Unsealed Roads*.

3.2 Steep descents

Steep descents shall be signed in accordance with *AS 1742.2 MUTCD Part 2: Traffic control devices for general use (2022)* clause 4.8.2.

For steep descents and long steep descents the R6-23 End Truck & Bus Low Gear Area in *AS 1742.2 (2022)* clause 4.8.2(b) is not recommended for use in South Australia. Rather, it is preferred that the R9-6-1 Next __m and the R9-7-1 Next __km should be used to define the extent of the area that the regulatory R6-22 Trucks & Buses Must Use Low Gear applies.

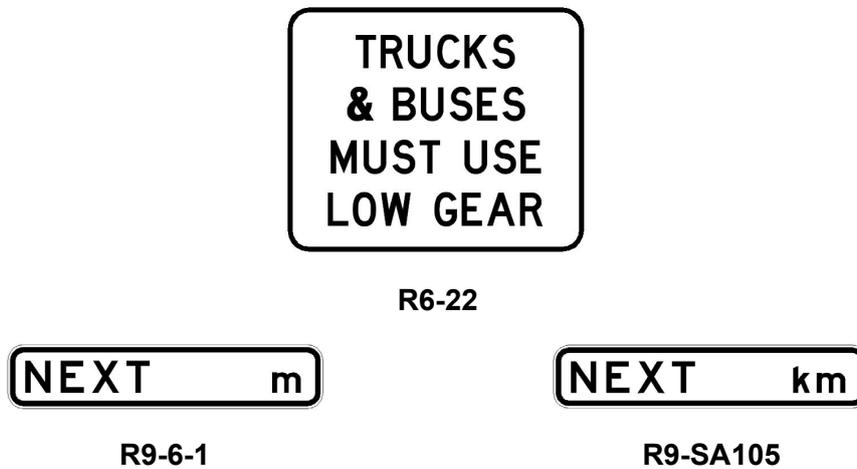

R7-SA100

The R7-SA100 sign may be used to provide advance notice of the Trucks and Buses Must Use Low Gear (R6-22).

For steep descents greater than 3 km additional advance warning shall be provided e.g. as installed on the South Eastern Freeway. Steep descents longer than 3 km are rare and advice from the Manager, Traffic Services should be sought prior to installing any such advance warning signs.



4 Environmental condition warning signs

4.1 Cross wind sign



W5-SA101

The purpose of this sign is to alert drivers to the possibility of high cross winds where they may be unexpected.

CROSS WIND signs (W5-SA101) are appropriate in isolated areas such as valleys, cuttings, and openings where strong intermittent winds or sudden gusts occur which can alter vehicle-handling capabilities. To enable road users to respond appropriately, the sign shall be supplemented with a WINDSOCK in the immediate vicinity.

Such devices provide drivers with an accurate guide to the strength and direction of the wind. Windsocks should be periodically checked and replaced when they become damaged, torn or tangled.

Signs should not be installed on relatively open roads where crosswinds occur over a long distance or where high crosswinds should be expected.

4.2 Water hazard sign

Water hazard signs are used to warn drivers of water hazards and hazardous road environments at water crossings in urban and rural areas. For remote areas reference should be made to *Operational Instruction 2.37 – Traffic Control Signs, Remote Area Unsealed Roads*. For other water hazard warning signs, refer to AS 1742.2 (2022) clause 4.9.

4.2.1 Creek and creeks



W5-SA109



W5-SA110

CREEK sign (W5-SA109) and CREEKS sign (W5-SA110) shall be used in advance of locations to indicate that the road is trafficable with care through a creek or creeks. Such situations should only occur on unsealed roads across natural creek beds (i.e., those not constructed as part of a road).

Where a number of creeks occur across a road in close proximity (≤ 2 km apart) it may be appropriate to use the CREEKS sign (W5-SA110) supplemented with a Next ___ km sign (W8-17-1). The use of the W8-17-1 sign is described in Section 5. It should be repeated at intervals of 3 to 5 km. If creek crossings are greater than 2 km apart, the CREEK signs (W5-SA109) should be used at each crossing.

5 NEXT__km Supplementary sign



W8-17-1

The NEXT__km supplementary sign (W8-17-1) should be used in conjunction with road and environmental conditions greater than or equal to 1 km. Only whole numbers of kilometres shall be shown.

Where it is used on a length of road subject to a series of discrete hazards (e.g. CREEKS) in close proximity (≤ 2 km apart), it should be repeated at intervals of 3 to 5 km. If each hazard location is greater than 2 km apart, consider signing each hazard location separately, or providing increased frequency of repeater signs.

Where the NEXT__km sign is used on a length of road subject to a continuous hazard, or a series of longer sections of the same hazard (eg ROUGH SURFACE, UNEVEN SURFACE), it should be repeated at intervals of 3 to 5 km. If there are gaps between sections of this hazardous condition of greater than 2 km, consider signing each section separately, or providing increased frequency of repeater signs.

Appendix A – Placement of maintenance condition warning signs

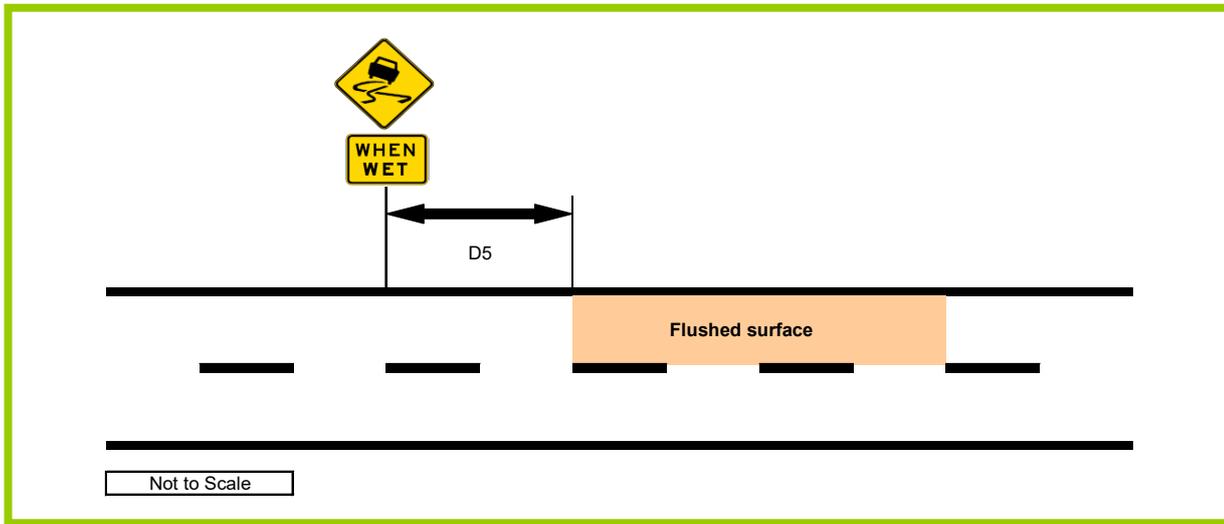


Figure 1: Short site (< 1 km) without an advisory or regulatory speed restriction.

NOTE: Refer Section 5 for use of “Next __ km” sign for longer sites. Refer Table 1 for D5.

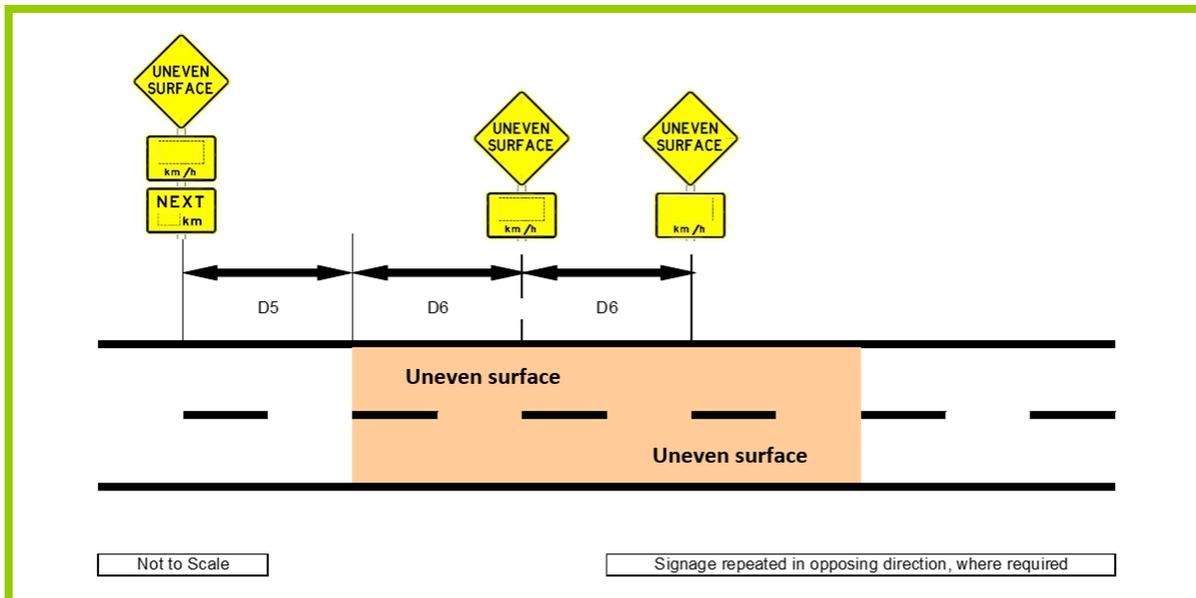


Figure 2: Long site (≥ 1 km) with an advisory speed

NOTE: The above shows a warning sign and speed advisory sign used to enhance safety for an uneven surface site. The speed advisory should be chosen based on the condition of the site. Refer Table 1 for D5 and D6. Refer TES 19152 for sign combination shown here (W5-43, W8-2 and W9-17-1)

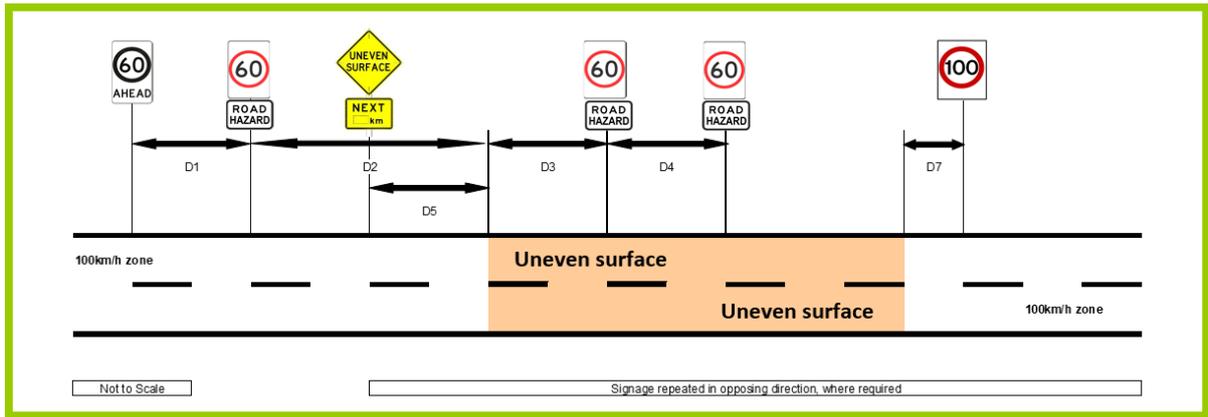


Figure 3: Long site in 100km/h zone with a lowered speed limit

NOTE: The above shows a 60 km/h zone used to enhance safety for an uneven surface site. The speed zone should be chosen based on the condition of the site and considering the road/section environment. Refer Table 1 for distances.

OFFICIAL

Posted Speed Limit	Temp Speed Limit	Minimum length for speed reduction	Buffer sign (G9-79) 	Distance between Buffer sign & R4-1 sign ¹	Speed limit sign (R4-1) 	Distance Between R4-1 sign & start of hazard site ²	Repeater R4-1 Sign 			Warning signs 		Return to Speed Sign
							Speed	Distance from start of hazard site	Repeater sign(s) distance ³	Distance between warning sign & start of hazard site	Repeater warning sign(s) distance (when used with advisory speed) ³	
(km/h)	(km/h)	(m)		D1 (m)	(km/h)	D2 (m)	(km/h)	D3 (m)	D4 (m)	D5 (m)	D6 (m)	D7 (m)
60	-	-	-	-	-	-	-	-	-	60-80	N/A if length of hazard is less than 500 m Repeater sign at midpoint if length of hazard is greater than 500 m and less than 1 km 500 m repeater distance if length of hazard is greater than 1 km	-
70	50	400	-	-	50	140	50	150	500	60-80		50
80	60	400	-	-	60	160	60	300	500	80-120		50
90	80	400	-	-	80	180	80	300	500	80-120		50
90	60	400	60 AHEAD	180	60	180	60	300	500	80-120		50
100	80	400	-	-	80	200	80	300	500	120-180		50
100	60	400	60 AHEAD	300	60	200	60	300	500	120-180		50
110	80	400	80 AHEAD	220	80	220	80	300	500	120-180		50
110	60	400	60 AHEAD	300	60	220	60	300	500	120-180		50

Table 1 – Sign positions for warnings signs in conjunction with regulatory or advisory speed signs

NOTES

1) Positioning of AHEAD signs (D1) determined in accordance with AS 1742.4 (2020) Section 3.1.3(c) for reduction of greater than 30 km/h. For reduction of 30 km/h, the AHEAD sign location is determined based on the guidance in Austroads *Guide to Temporary Traffic Management Part 3: Static Worksites* (2021) Section 5.5.1 Temporary Speed Limits i.e., double the distance of the speed in advance of the R4-1 sign.

2) Positioning of first R4-1 sign (D2) determined to provide a minimum of 0.6V to the condition warning sign.

3) Where a side road intersects the signed section (of the main road), additional warning & speed signs should be placed near the intersection. Repeater sign spacing is based on the guidance in Austroads *Guide to Temporary Traffic Management Part 3: Static Worksites* (2021) Section 5.5.1 Temporary Speed Limits.